

ALUK[®]
F82 BI-FOLD

STYLISH
BI-FOLDING
DOOR

FENSA
Registered Company



Glass & Glazing Federation Member



Secured by Design
Official Police Security Initiative





Size Limits

Max Vent Weight	150kg
Max Leaf Height	2600mm

FRAME DEPTH	82mm
GLAZING THICKNESS	28mm - 54mm
GLAZING OPTION	Beaded
DUAL COLOUR OPTION	✓

PERFORMANCE	
U-VALUE (DOUBLE GLAZING)	From 1.3 W/m²K
U-VALUE (TRIPLE GLAZING)	1.1 W/m²K
AIR TIGHTNESS	NPD
WATER TIGHTNESS	NPD
WIND LOAD	NPD
SECURITY	NPD



STYLISH BI-FOLD DOORS

A contemporary stylish bi-fold door. With thinner sightlines and interlock of 122mm wick provide larger glazing panels without compromising on performance. The door also offers HD compact slim stainless steel rollers as standard allowing for a smooth movement whilst opening and closing.


DESIGN FEATURES

- Re-designed flush pop-out handle
- Unique traffic door
- HD compact rollers as standard
- 4 stainless slim steel rollers
- Both frame and cill sightlines of 97mm
- All configurations available open in and open out


OPTIONS

- Chamfered and square bead options
- Glazing 28mm - 54mm
- Available in a range of opening configurations
- Available in a range of single or dual colour and anodised finishes
- All configurations available open in and open out
- Chamfered and square based options

F82 Cill

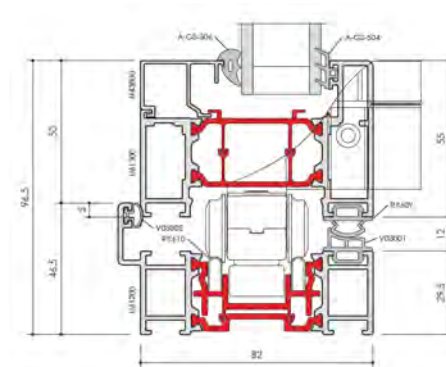

F82 Interlock

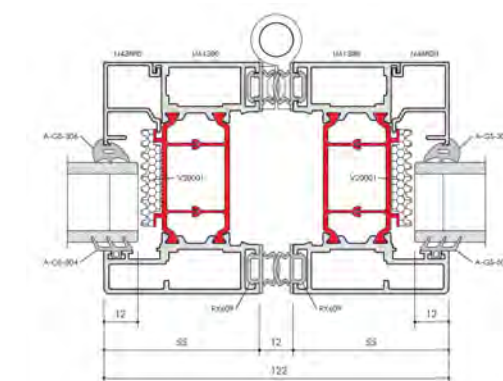

F82 Jamb

