

UNIFOLD

WATCH  
THE WORLD  
UNFOLD

FENSA  
Registered Company



Glass & Glazing Federation Member



Official Police Security Initiative





UNIFOLD

THE EFFORTLESSLY SLIM  
NEW FOLDING SLIDING  
DOOR


With **just a 120mm, glass-to-glass sightline**, UniFold will open up your room to the light and bring the outside in, creating a functional, open space for living, working and entertaining.

- Slim 120mm glass-to-glass sightline
- Fully Adjustable for ease of installation
- Can achieve PAS 24 / Secured by design
- Fully openable corners
- Market beating prices

Size  
Limits

Maximum panel width	1200 mm
Maximum panel height	3000 mm
Maximum panel weight	120 kg

FRAME DEPTH	73 mm
GLAZING THICKNESS	24-44 mm
GLAZING METHOD	Internally beaded
MINIMUM SIGHTLINE	120 mm
ENHANCED SECURITY	PAS24

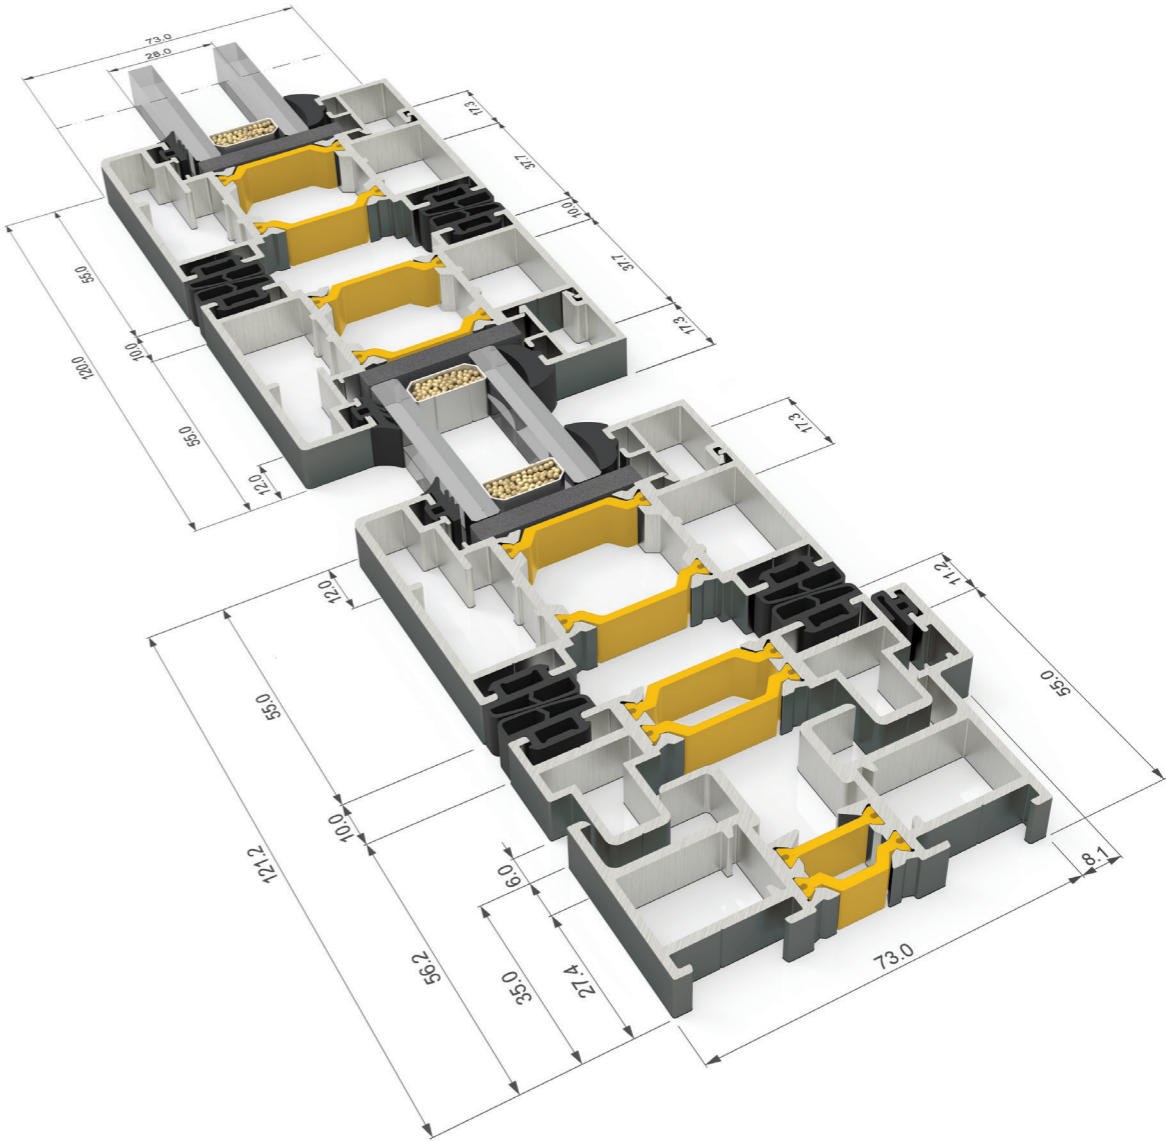

PERFORMANCE	
U-VALUE	From 1.4 W/m²K
AIR PERMEABILITY	Class 4
WATER TIGHTNESS	Class 9A
WIND RESISTANCE	Class A3

THRESHOLD HEIGHT	
STANDARD	55 mm
DEEP	67.5 mm
LOW	40 mm
ULTRA LOW	20 mm